


Depth stops are used to limit measuring depths. They can be clamped to the corresponding depth extension or to the holder.

**Example:**

- 1 = Indicator
- 2 = Holder
- 3 = Depth stop
- 4 = Depth extension
- 5 = BMD

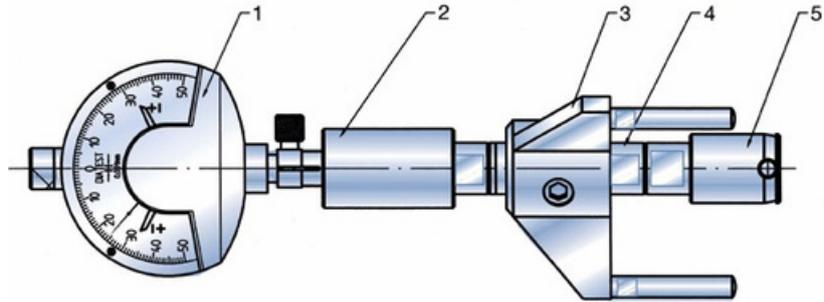


## TA8

### Depth stop for Series 6

Can be attached to TV8 or holder MH6

Sizes:

- TA8 total length 83 mm
- TA8-K total length 45 mm

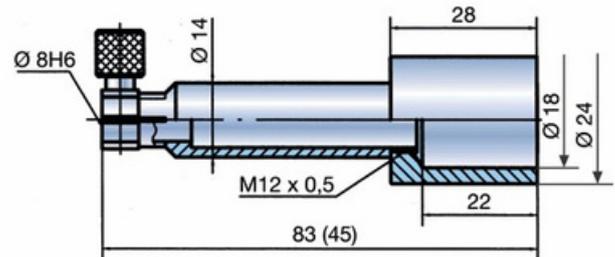

## TA15


### Depth stop for Series 10

Can be attached to TV15 or MH10-

Instead of the clamping fixture, the TA15 is also available with M24 x 1 threading (for screw connection to TA15-C or TA15-F, for example).

Order suffix: M24, example: TA15-45-M24

Ø D	Order Code	Ø D	Order Code
45	TA15-45	160	TA15-160
75	TA15-75	220	TA15-220
110	TA15-110	260	TA15-260

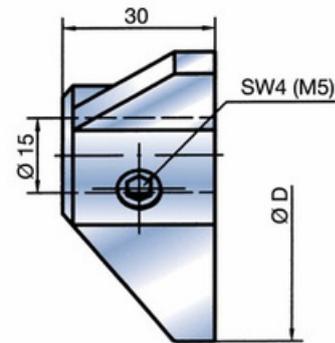

## TA15-A

### Depth stop for Series 10 with 3 stop pins

Can be attached to TV15 or MH10


Special version: Ø d deviating from standard

Order suffix: SO-Ød, example: TA15-A-45-SO-Ø d=32

Instead of the clamping fixture, the TA15 is also available with M24 x 1 threading (for screw connection to TA15-C or TA15-F, for example).

Order suffix: M24

Example: TA15-A-45-SO-Ø d = 32-M24

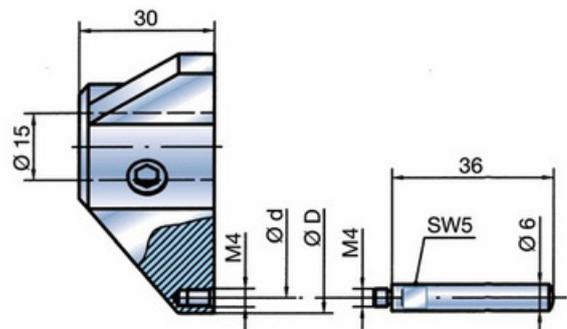


Ø D	Ø d	Order Code
45	38	TA15-A-45
75	68	TA15-A-75
110	103	TA15-A-110

Ø D	Ø d	Order Code
160	153	TA15-A-160
220	213	TA15-A-220
260	253	TA15-A-260

## TA15-C

### Basic depth stop body

Can be attached to TV15 or MH10. To be screwed onto special stop rings or TA15/TA15-A with M24 x 1 threading. Special stop rings can be produced on request.  
Order Code: TA15-C

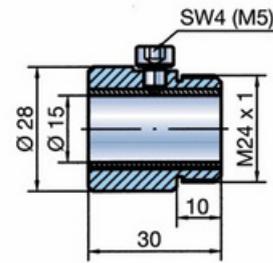

## TA-KW


### Depth stop designed for clamping to BMD guide cylinders

Available versions:

- TA-KW depth stop, steel, non-hardened (standard)
- TA-KH depth stop, steel with 3 carbide (HM) balls as contact points in pitch diameter TK
- TA-KG depth stop, steel, hardened

(Caution: increased risk of distortion of BMD cylinder)

TA-KW depth stops can only be produced up to 100 mm!  
Sample order: TA-KW-15.75 (= Ø d)

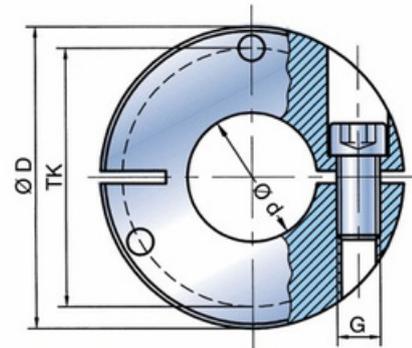

Ø d	Ø D	TK	h	G	Ø d	Ø D	TK	h	G
3-5	27	16	10	M4	35-40	65	53	12	M5
5-8	30	19	10	M4	40-45	70	58	12	M5
8-11	33	22	10	M4	45-50	75	63	12	M5
11-15	37	26	10	M4	50-60	85	73	12	M5
15-20	42	31	10	M4	60-70	95	83	12	M5
20-25	50	38	12	M5	70-80	105	93	12	M5
25-30	55	43	12	M5	80-90	115	103	12	M5
30-35	60	48	12	M5	90-100	125	113	12	M5

## TA15-F

## TA8-F

### Spring-loaded depth stop

Can be attached to TV15 or TV8. Spring stroke is continuously adjustable from 0 to 7 mm. TA15-F can be combined with TA15-M24, TA15-A-M24 and special depth stop disks. TA8-F always has to be used in combination with special depth stop disks.  
Sample application: For measuring short bores on two measuring planes (taper, etc.)

Order Code: TA15-F (to be clamped on TV15)  
TA8-F (to be clamped on TV8)

Ø D	Ø D1	G1
30	35	M24x1
20	26	M18x1

